



VIA Labs, Inc.


Data Sheet

VL820 (D0)

USB 3.1 Gen 2 Hub Controller

December 12th, 2016

Revision 1.01

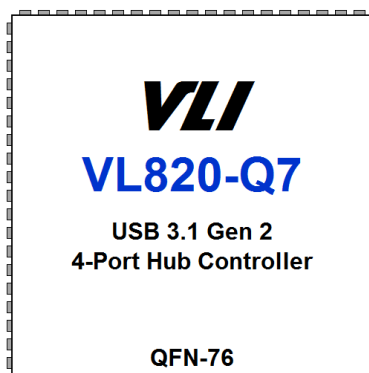

Revision History

Rev	Date	Note	Initial
0.50	04/14/2016	First Preliminary Release; C0 Silicon	TS
0.55	05/11/2016	Added Pin Out, Pin Description, Top Side Marking, and Package Outline Diagram for QFN76.	TS
0.60	05/19/2016	Update Block Diagram and Electrical Specification data.	TS
0.90	10/02/2016	Update Electrical Specification data, and Chip version to D0.	EC
1.00	11/16/2016	Formal Release.	EC
1.01	12/12/2016	Update for typo and ordering information	EC

VIA CONFIDENTIAL

Contents

Revision History	2
Contents	3
List of Figures	3
Product Features	4
VL820 System Overview.....	5
USB Battery Charging Behavior.....	6
Pinout (VL820-Q7).....	7
Pin List (VL820-Q7)	8
Pin Descriptions (VL820-Q7).....	9
Pinout (VL820-Q8).....	12
Pin List (VL820-Q8)	13
Pin Descriptions (VL820-Q8).....	14
Electrical Specification.....	18
Timing Requirements for SPI Flash	19
General Reflow Profile Guidelines.....	21
Package Mechanical Specifications (VL820-Q7).....	22
Package Mechanical Specifications (VL820-Q8).....	23
Package Top Side Marking & Ordering Information.....	24

List of Figures

Figure 1 – VL820 Block Diagram.....	5
Figure 2 – VL820-Q7 Pin Diagram.....	7
Figure 3 – VL820-Q8 Pin Diagram.....	12
Figure 4 – Illustration of SPI Flash Interface Timing – (1)	20
Figure 5 – Illustration of SPI Flash Interface Timing – (2)	20
Figure 6 – Reflow	21
Figure 7 – Mechanical Specification – QFN 76L 9x9x0.85 mm Package	22
Figure 8 – Mechanical Specification – QFN 88L 10x10x0.85 mm Package.....	23
Figure 9 –Package Top Side Marking	24

Product Features

VL820-Q8 / VL820-Q7

USB 3.1 Gen 2 SuperSpeed Plus 4-Port USB Hub Controller

■ USB 3.1 Compliant

- Compliant to Universal Serial Bus 3.1 Specification
- SuperSpeed Plus USB (USB 3.1 Gen 2)
- Compliant to Universal Serial Bus 2.0 Specification
- USB 2.0 Hub Supports MTT
- Supports Simultaneous Operation of Any Combination of SuperSpeed Plus, SuperSpeed, High-Speed, Full-Speed, and Low-Speed Devices
- Supports USB Power Saving Features such as Link Power Management, Ux States, Selective Suspend, and Function Suspend
- In-house USB PHY employs advanced CMOS process for low power consumption
-

■ USB Type-C 1.0 Rev 1.2 Compliant

- Compliant to USB Type-C Specification Rev 1.2
- VL820-Q8: Integrated 10Gbps Mux for UFP and 2x DFP
- Additional USB-C DFP support requires separate CC Logic and Mux (Such as VL160)

■ Integrated USB Devices

- USB Billboard Class 1.21 Device
Implemented as a USB 2.0 Virtual Device
Configurable Behavior – Expose When Necessary / Always Present / Disabled
- USB HID Class Device
Implemented as a USB 2.0 Virtual Device, Facilitates FW Update or Media Control Buttons
Configurable Behavior – Always Present / Disabled

■ Full Sideband Signal Support

- Supports Any Combination of Individual or Ganged Mode Over-Current for All Ports
- Supports PWM LED Status Lights
- SPI Interface for Firmware.
- Firmware Upgradable over USB

■ Comprehensive USB Battery Charging Support

- Supports USB Battery Charging Specification v1.2 (SDP, CDP, DCP)
- Support for Vendor Specific Charging Modes eg. Apple 2.4A, Samsung, etc.
- Supports YD/T 1591-2009
- Supports Stand-Alone Charging when System is Suspend, Shut Down, or Disconnected
- Any Combination of DFPs can be Configured to Support USB Battery Charging

■ Power and Package

- Requires 3.3V and 1.05V Inputs
- VL820-Q8: QFN 88L green package (10x10x0.85 mm)
- VL820-Q7: QFN 76L green package (9x9x0.85 mm)
- 25MHz Xtal

VL820 System Overview

VIA Lab's VL820 is the world's first USB 3.1 Gen 2 Hub Controller and it features highly-integrated, application specific design. VL820 features 1x upstream port and 4x downstream ports, all of which support 10Gbps USB 3.1 Gen 2 operation. The downstream ports can support any combination of SuperSpeed Plus (10Gbps), SuperSpeed (5Gbps), High Speed (480Mbps), Full Speed (12Mbps), and Low Speed (1.5Mbps) devices. VL820's integrated USB 2.0 hub features Multiple Transaction Translators, providing increased bandwidth and performance when multiple Full Speed devices are simultaneously used.

VL820 comes in two variants: VL820-Q8 utilizes the QFN88 10x10x0.85 mm package while the VL820-Q7 utilizes the smaller QFN76 9x9x0.85mm package. The larger QFN88 variant features integrated 10Gbps Muxes for the Upstream Facing Port and two Downstream Facing Ports whereas the smaller QFN76 variant does not. The integrated 10Gbps Muxes are ideal for Data-Only USB-C applications that would otherwise require an external Mux, with the advantage of potential board area savings and improved signal integrity. If additional USB-C Ports are needed, separate CC Logic and Mux solutions such as VL160 are available.

VL820 features an optionally configurable USB Billboard Device when used in USB-PD Alternate Mode applications, and an optionally configurable USB HID endpoint to support Media Control Buttons such as Play/Pause, Volume Up/Down, etc.

VL820 features a flexible firmware architecture, providing a framework for custom functions in addition to in-field updates. Various parameters including USB configuration, Tx equalization setting, and GPIO behavior are changeable via firmware. VL820 also features an optionally configurable USB Charging Controller for charging various devices such as smartphones and tablets that can be configured on a per-port basis.

VL820-based hub devices work under Windows, Mac OS X, and various Linux kernels without additional drivers. VL820-based hub devices are also compatible with non-x86 devices and platforms that support USB hub functions such as smart phones, tablets, and set-top boxes. It is well suited for all USB hub applications such as standalone USB hubs, Notebook/Ultrabook docking stations/port-replicators, desktop PC front panel, motherboard on-board hub, and USB hub compound devices.

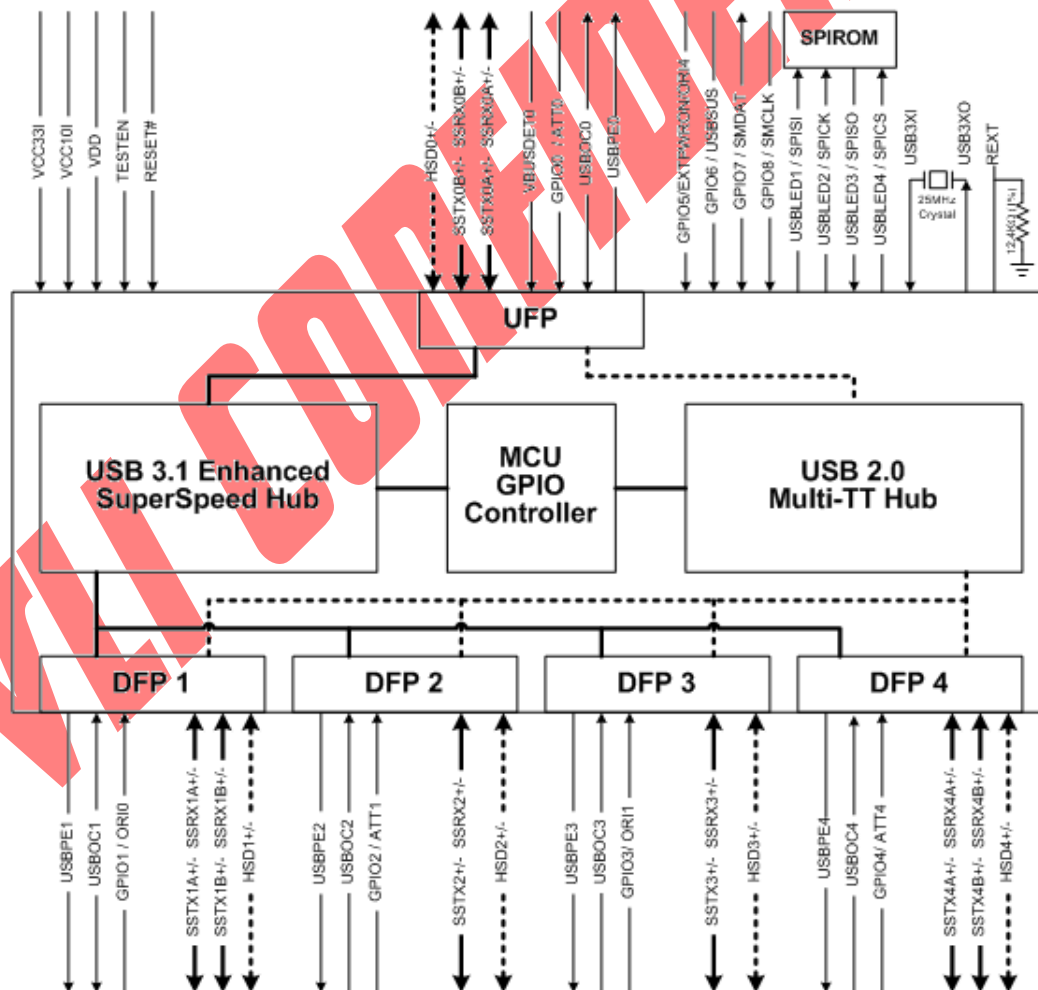


Figure 1 – VL820 Block Diagram

USB Battery Charging Behavior

3 Concepts of Rapid Charging over USB:

■ **Rapid Charging over USB enables charging of devices at rates in excess of baseline USB standards.**

The current limit of USB 2.0 is 500mA for configured devices, and the current limit of USB 3.0 is 900mA for configured devices. Depending on the device, Rapid Charging implementations typically feature current limits between 1000mA to 2400mA.

■ **It is the Host/Hub's responsibility to advertise Rapid Charging capabilities, and it is the Device's responsibility to recognize and determine those capabilities.**

Rapid Charging over USB enables charging at rates in excess of baseline USB specifications, so in order to prevent a situation where a device sinks more current than what a port is rated for, different manufacturers employ various charging schemes in an attempt to ensure safe and reliable operation with their respective device and charger. It goes without saying that Rapid Charging will only occur when both Host/Hub and Device supports it.

■ **The rate at which a device charges is dependant upon the device.**

This means that the device must determine the host/hub port's capabilities to determine which charging mode to use. Also, the rate at which a device charges can vary depending on the status of the device. For example, some devices only charge at their maximum rate when the battery is nearly depleted. When the battery is nearly full, they may switch to a trickle-charge mode. The Host/Hub rapid-charging port has no control over this behavior.

Supported USB Charging Modes

SDP – Standard Downstream Port

This is a typical USB 2.0 or USB 3.0 port and does not explicitly support Rapid USB Charging. SDP is constrained to the current limits as defined in the USB 2.0 or USB 3.0 spec which are 500mA and 900mA respectively. While the actual current limit is enforced by the polyfuse or power-switch providing current-limiting functionality for the downstream port, most USB devices will not draw more than 500mA or 900mA under USB 2.0 or USB 3.0 modes.

CDP – Charging Downstream Port

CDP is defined in the USB Battery Charging Specification 1.2 and enables devices that are able to correctly recognize CDP to simultaneously function as a USB device while drawing up to 1.5A for Rapid Charging when connected to the downstream port of a USB Host or Hub that advertises CDP capability.

DCP – Dedicated Charging Port

DCP is defined in the USB Battery Charging Specification 1.2 and has been in use on an unofficial basis prior to the official USB Battery Charging Specification. DCP is a dedicated charging mode, so when a device is charging under DCP, regular USB operations such as data transfer to the device are not supported.

Special Modes

Various vendors such as Apple, RIM, Motorola, etc may employ different detection mechanisms compared to other USB devices and thus, may enter Rapid Charging under the previously mentioned charging modes. VL820 supports an auto detection mechanism that provides charging for the majority of devices.

Pinout (VL820-Q7)

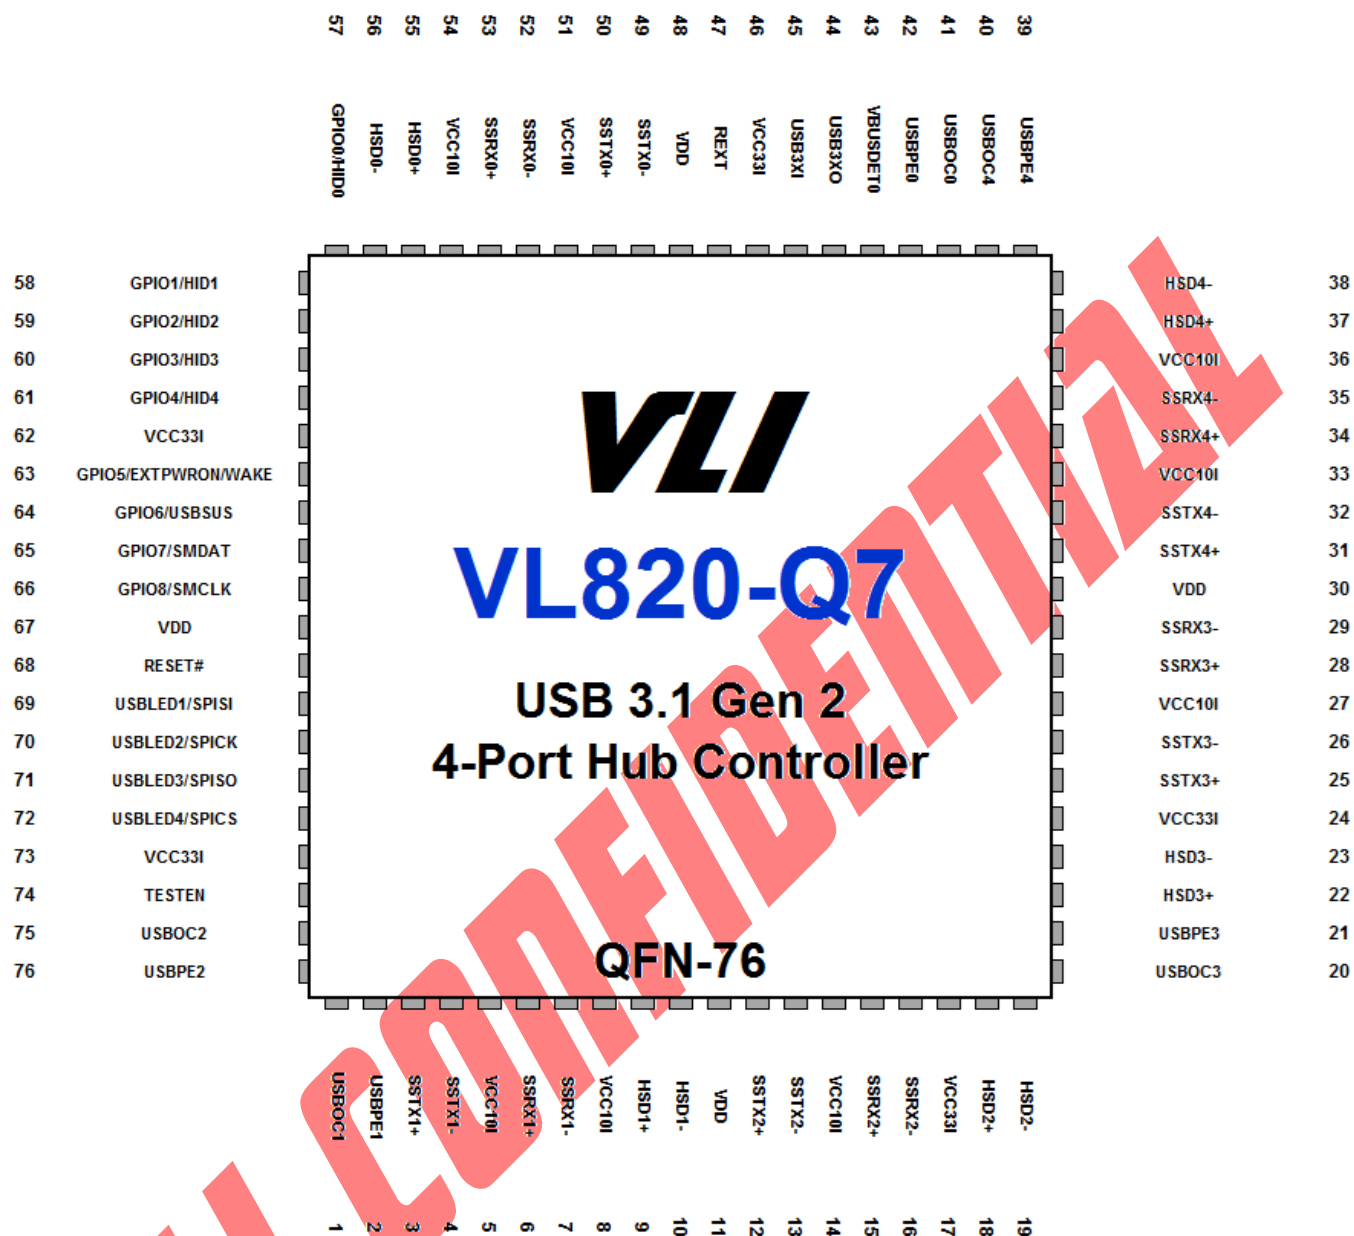


Figure 2 – VL820-Q7 Pin Diagram

Pin List (VL820-Q7)

Table 1 – VL820-Q7 Pin List

Pin	Pin Name	Pin	Pin Name
1	USBOC1	39	USBPE4
2	USBPE1	40	USBOC4
3	SSTX1+	41	USBOC0
4	SSTX1-	42	USBPE0
5	VCC10I	43	VBUSDET0
6	SSRX1+	44	USB3XO
7	SSRX1-	45	USB3XI
8	VCC10I	46	VCC33I
9	HSD1+	47	REXT
10	HSD1-	48	VDD
11	VDD	49	SSTX0-
12	SSTX2+	50	SSTX0+
13	SSTX2-	51	VCC10I
14	VCC10I	52	SSRX0-
15	SSRX2+	53	SSRX0+
16	SSRX2-	54	VCC10I
17	VCC33I	55	HSD0+
18	HSD2+	56	HSD0-
19	HSD2-	57	GPIO0/HID0
20	USBOC3	58	GPIO1/HID1
21	USBPE3	59	GPIO2/HID2
22	HSD3+	60	GPIO3/HID3
23	HSD3-	61	GPIO4/HID4
24	VCC33I	62	VCC33I
25	SSTX3+	63	GPIO5/EXTPWON/WAKE
26	SSTX3-	64	GPIO6 / USBUS
27	VCC10I	65	GPIO7 / SMDAT
28	SSRX3+	66	GPIO8 / SMCLK
29	SSRX3-	67	VDD
30	VDD	68	RESET#
31	SSTX4+	69	USBLED1 / SPISI
32	SSTX4-	70	USBLED2 / SPICK
33	VCC10I	71	USBLED3 / SPISO
34	SSRX4+	72	USBLED4 / SPICS
35	SSRX4-	73	VCC33I
36	VCC10I	74	TESTEN
37	HSD4+	75	USBOC2
38	HSD4-	76	USBPE2

Pin Descriptions (VL820-Q7)

Signal Type Definition

Name	Type	Signal Description
Input	I	A logic input-only signal
Output	O	A logic output only signal
Input/Output	I/O	A logic bi-directional signal
Power	PWR	A power pin
Ground	GND	A ground pin

USB 3.1 Interface

Pin Name	Pin #	I/O	Signal Description
SSTX0-	49	O	USB 3.1 UFP Differential TX-
SSTX0+	50	O	USB 3.1 UFP Differential TX+
SSRX0-	52	I	USB 3.1 UFP Differential RX-
SSRX0+	53	I	USB 3.1 UFP Differential RX+
SSTX1+	3	O	USB 3.1 DFP1 Differential TX+
SSTX1-	4	O	USB 3.1 DFP1 Differential TX-
SSRX1+	6	I	USB 3.1 DFP1 Differential RX+
SSRX1-	7	I	USB 3.1 DFP1 Differential RX-
SSTX2+	12	O	USB 3.1 DFP2 Differential TX+
SSTX2-	13	O	USB 3.1 DFP2 Differential TX-
SSRX2+	15	I	USB 3.1 DFP2 Differential RX+
SSRX2-	16	I	USB 3.1 DFP2 Differential RX-
SSTX3+	25	O	USB 3.1 DFP3 Differential TX+
SSTX3-	26	O	USB 3.1 DFP3 Differential TX-
SSRX3+	28	I	USB 3.1 DFP3 Differential RX+
SSRX3-	29	I	USB 3.1 DFP3 Differential RX-
SSTX4+	31	O	USB 3.1 DFP4 Differential TX+
SSTX4-	32	O	USB 3.1 DFP4 Differential TX-
SSRX4+	34	I	USB 3.1 DFP4 Differential RX+
SSRX4-	35	I	USB 3.1 DFP4 Differential RX-

Analog Command Block

Pin Name	Pin #	I/O	Signal Description
USB3XO	44	O	25M Crystal Output
USB3XI	45	I	25M Crystal Input
REXT	47	I	Connect to External Reference Resistor (12.4K+/- 1%)

Test Pin

Pin Name	Pin #	I/O	Signal Description
TESTEN	74	I	Test Mode Enable Low: Normal mode. High: Test mode.
GPIO7 / SMDAT	65	I/O	SMBus data with Proprietary Data Format. Open Drain. Available for GPIO Use via Firmware Setting.
GPIO8 / SMCLK	66	I/O	SMBus clock with Proprietary Data Format. Open Drain. Available for GPIO Use via Firmware Setting.

USB 2.0 Interface

Pin Name	Pin #	I/O	Signal Description
HSD0+	55	I/O	USB 2.0 UFP Differential D+
HSD0-	56	I/O	USB 2.0 UFP Differential D-
HSD1+	9	I/O	USB 2.0 DFP1 Differential D+
HSD1-	10	I/O	USB 2.0 DFP1 Differential D-
HSD2+	18	I/O	USB 2.0 DFP2 Differential D+
HSD2-	19	I/O	USB 2.0 DFP2 Differential D-
HSD3+	22	I/O	USB 2.0 DFP3 Differential D+
HSD3-	23	I/O	USB 2.0 DFP3 Differential D-
HSD4+	37	I/O	USB 2.0 DFP4 Differential D+
HSD4-	38	I/O	USB 2.0 DFP4 Differential D-

Power and Ground

Pin Name	Pin #	I/O	Signal Description
GND	EPAD	GND	Ground
VDD	11, 30, 48, 67	PWR	1.05V Core Power
VCC10I	5, 8, 14, 27, 33, 36, 51, 54	PWR	1.05V Analog Power
VCC33I	17, 24, 46, 62, 73	PWR	3.3V Analog Power

Side Band Signal and Miscellaneous

Pin Name	Pin #	I/O	Signal Description
USBOC0	41	I or I/O	UFP USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE0	42	O	UFP USB PE USB Power Enable Mode High: Enable Low: Off
USBOC1	1	I or I/O	DFP1 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE1	2	O	DFP1 USB PE USB Power Enable Mode High: Enable Low: Off

Side Band Signal and Miscellaneous

Pin Name	Pin #	I/O	Signal Description
USBOC2	75	I or I/O	DFP2 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE2	76	O	DFP2 USB PE USB Power Enable Mode High: Enable Low: Off
USBOC3	20	I or I/O	DFP3 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE3	21	O	DFP3 USB PE USB Power Enable Mode High: Enable Low: Off
USBOC4	39	I or I/O	DFP4 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE4	40	O	DFP4 USB PE USB Power Enable Mode High: Enable Low: Off
GPIO0 / HID0	57	I/O	GPIO / HID Shared Pin (FW Config)
GPIO1 / HID1	58	I/O	GPIO / HID Shared Pin (FW Config)
GPIO2 / HID2	59	I/O	GPIO / HID Shared Pin (FW Config)
GPIO3 / HID3	60	I/O	GPIO / HID Shared Pin (FW Config)
GPIO4 / HID4	61	I/O	GPIO / HID Shared Pin (FW Config)
GPIO5 / EXTPWRON / WAKE	63	I/O	GPIO / External Power Status / Wake Shared Pin (FW Config)
GPIO6 / USB SUS	64	I/O	GPIO (FW Config)
RESET#	68	I	System Reset Low: Reset High: Normal Operation
USBLED1 / SPISI	69	I/O	DFP1 LED Indicator / SPISI shared pin. Active High Output for LED Use.
USBLED2 / SPICLK	70	I/O	DFP2 LED Indicator / SPISCLK shared pin. Active High Output for LED Use.
USBLED3 / SPISO	71	I/O	DFP3 LED Indicator / SPISO shared pin. Active High Output for LED Use.
USBLED4 / SPICS	72	I/O	DFP4 LED Indicator / SPICS shared pin. Active High Output for LED Use
VBUSDET0	43	I	UFP Vbus Detection (3.3V Max)

Pinout (VL820-Q8)

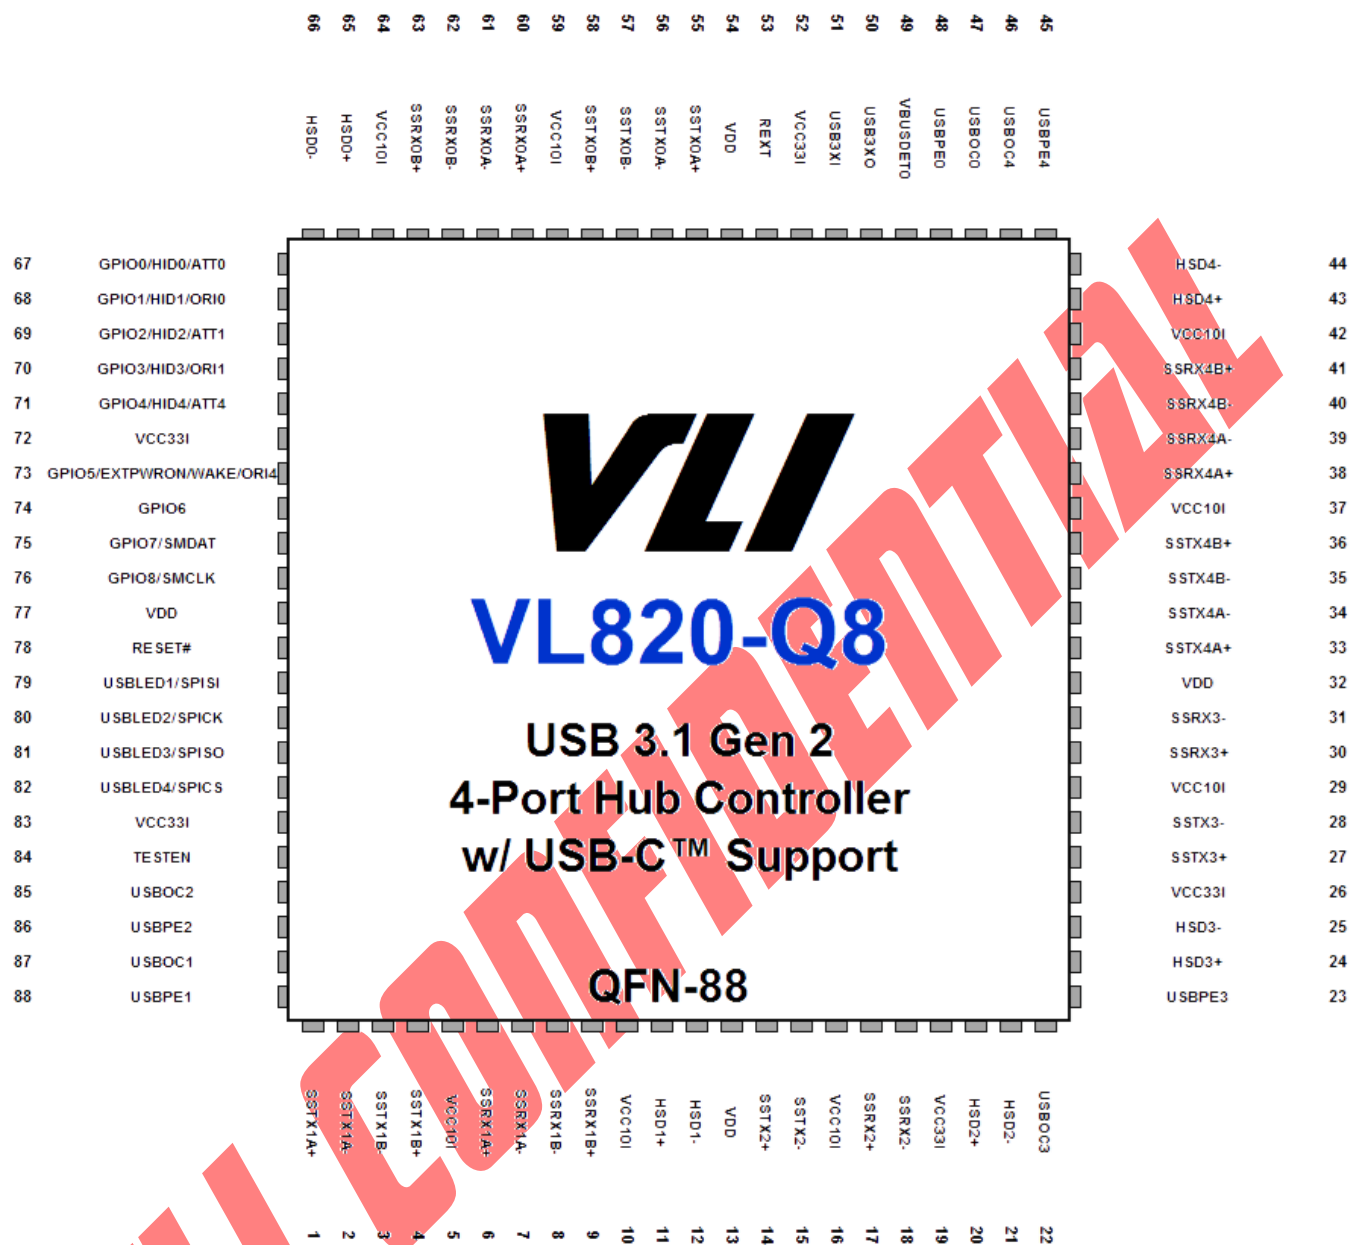


Figure 3 – VL820-Q8 Pin Diagram

Pin List (VL820-Q8)

Table 2 – VL820-Q8 Pin List

Pin	Pin Name	Pin	Pin Name
1	SSTX1A+	45	USBPE4
2	SSTX1A-	46	USBOC4
3	SSTX1B-	47	USBOC0
4	SSTX1B+	48	USBPE0
5	VCC10I	49	VBUSDET0
6	SSRX1A+	50	USB3X0
7	SSRX1A-	51	USB3XI
8	SSRX1B-	52	VCC33I
9	SSRX1B+	53	REXT
10	VCC10I	54	VDD
11	HSD1+	55	SSTX0A+
12	HSD1-	56	SSTX0A-
13	VDD	57	SSTX0B-
14	SSTX2+	58	SSTX0B+
15	SSTX2-	59	VCC10I
16	VCC10I	60	SSRX0A+
17	SSRX2+	61	SSRX0A-
18	SSRX2-	62	SSRX0B-
19	VCC33I	63	SSRX0B+
20	HSD2+	64	VCC10I
21	HSD2-	65	HSD0+
22	USBOC3	66	HSD0-
23	USBPE3	67	GPIO0/HID0/ATT0
24	HSD3+	68	GPIO1/HID1/ORI0
25	HSD3-	69	GPIO2/HID2/ATT1
26	VCC33I	70	GPIO3/HID3/ORI1
27	SSTX3+	71	GPIO4/HID4/ATT4
28	SSTX3-	72	VCC33I
29	VCC10I	73	GPIO5/EXTPWRON/WAKE/ORI4
30	SSRX3+	74	GPIO6
31	SSRX3-	75	GPIO7 / SMDAT
32	VDD	76	GPIO8 / SMCLK
33	SSTX4A+	77	VDD
34	SSTX4A-	78	RESET#
35	SSTX4B-	79	USBLED1 / SPISI
36	SSTX4B+	80	USBLED2 / SPICK
37	VCC10I	81	USBLED3 / SPISO
38	SSRX4A+	82	USBLED4 / SPICS
39	SSRX4A-	83	VCC33I
40	SSRX4B-	84	TESTEN
41	SSRX4B+	85	USBOC2
42	VCC10I	86	USBPE2
43	HSD4+	87	USBOC1
44	HSD4-	88	USBPE1

Pin Descriptions (VL820-Q8)

Signal Type Definition

Name	Type	Signal Description
Input	I	A logic input-only signal
Output	O	A logic output only signal
Input/Output	I/O	A logic bi-directional signal
Power	PWR	A power pin
Ground	GND	A ground pin

USB 3.1 Interface

Pin Name	Pin #	I/O	Signal Description
SSTX0A+	55	O	USB 3.1 UFP Differential TX+; Side A
SSTX0A-	56	O	USB 3.1 UFP Differential TX-; Side A
SSTX0B-	57	O	USB 3.1 UFP Differential TX-; Side B
SSTX0B+	58	O	USB 3.1 UFP Differential TX+; Side B
SSRX0A+	60	I	USB 3.1 UFP Differential RX+; Side A
SSRX0A-	61	I	USB 3.1 UFP Differential RX-; Side A
SSRX0B-	62	I	USB 3.1 UFP Differential RX-; Side B
SSRX0B+	63	I	USB 3.1 UFP Differential RX+; Side B
SSTX1A+	1	O	USB 3.1 DFP1 Differential TX+; Side A
SSTX1A-	2	O	USB 3.1 DFP1 Differential TX-; Side A
SSTX1B-	3	O	USB 3.1 DFP1 Differential TX-; Side B
SSTX1B+	4	O	USB 3.1 DFP1 Differential TX+; Side B
SSRX1A+	6	I	USB 3.1 DFP1 Differential RX+; Side A
SSRX1A-	7	I	USB 3.1 DFP1 Differential RX-; Side A
SSRX1B-	8	I	USB 3.1 DFP1 Differential RX-; Side B
SSRX1B+	9	I	USB 3.1 DFP1 Differential RX+; Side B
SSTX2+	14	O	USB 3.1 DFP2 Differential TX+
SSTX2-	15	O	USB 3.1 DFP2 Differential TX-
SSRX2+	17	I	USB 3.1 DFP2 Differential RX+
SSRX2-	18	I	USB 3.1 DFP2 Differential RX-
SSTX3+	27	O	USB 3.1 DFP3 Differential TX+
SSTX3-	28	O	USB 3.1 DFP3 Differential TX-
SSRX3+	30	I	USB 3.1 DFP3 Differential RX+
SSRX3-	31	I	USB 3.1 DFP3 Differential RX-
SSTX4A+	33	O	USB 3.1 DFP4 Differential TX+; Side A
SSTX4A-	34	O	USB 3.1 DFP4 Differential TX-; Side A
SSTX4B-	35	O	USB 3.1 DFP4 Differential TX-; Side B
SSTX4B+	36	O	USB 3.1 DFP4 Differential TX+; Side B
SSRX4A+	38	I	USB 3.1 DFP4 Differential RX+; Side A
SSRX4A-	39	I	USB 3.1 DFP4 Differential RX-; Side A
SSRX4B-	40	I	USB 3.1 DFP4 Differential RX-; Side B
SSRX4B+	41	I	USB 3.1 DFP4 Differential RX+; Side B

USB 2.0 Interface

Pin Name	Pin #	I/O	Signal Description
HSD0+	65	I/O	USB 2.0 UFP Differential D+
HSD0-	66	I/O	USB 2.0 UFP Differential D-
HSD1+	11	I/O	USB 2.0 DFP1 Differential D+
HSD1-	12	I/O	USB 2.0 DFP1 Differential D-
HSD2+	20	I/O	USB 2.0 DFP2 Differential D+
HSD2-	21	I/O	USB 2.0 DFP2 Differential D-
HSD3+	24	I/O	USB 2.0 DFP3 Differential D+
HSD3-	25	I/O	USB 2.0 DFP3 Differential D-
HSD4+	43	I/O	USB 2.0 DFP4 Differential D+
HSD4-	44	I/O	USB 2.0 DFP4 Differential D-

Analog Command Block

Pin Name	Pin #	I/O	Signal Description
USB3XO	50	O	25M Crystal Output
USB3XI	51	I	25M Crystal Input
REXT	53	I	Connect to External Reference Resistor (12.4K+/- 1%)

Power and Ground

Pin Name	Pin #	I/O	Signal Description
GND	EPAD	GND	Ground
VDD	13,32,54, 77	PWR	1.05V Core Power
VCC10I	5, 10, 16, 29, 37, 42, 59, 64,	PWR	1.05V Analog Power
VCC33I	19, 26, 52, 72, 83	PWR	3.3V Analog Power

Test Pin

Pin Name	Pin #	I/O	Signal Description
TESTEN	84	I	Test Mode Enable Low: Normal mode. High: Test mode.
GPIO7 / SMDAT	75	I/O	SMBus data with Proprietary Data Format. Open Drain. Available for GPIO Use via Firmware Setting.
GPIO8 / SMCLK	76	I/O	SMBus clock with Proprietary Data Format. Open Drain. Available for GPIO Use via Firmware Setting.

Side Band Signal and Miscellaneous

Pin Name	Pin #	I/O	Signal Description
USBOC0	47	I or I/O	UFP USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE0	48	O	UFP USB PE USB Power Enable Mode High: Enable Low: Off
USBOC1	87	I or I/O	DFP1 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE1	88	O	DFP1 USB PE USB Power Enable Mode High: Enable Low: Off
USBOC2	85	I or I/O	DFP2 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE2	86	O	DFP2 USB PE USB Power Enable Mode High: Enable Low: Off
USBOC3	22	I or I/O	DFP3 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE3	23	O	DFP3 USB PE USB Power Enable Mode High: Enable Low: Off
USBOC4	45	I or I/O	DFP4 USB OC USB Over Current Detection High: Normal Low: Port Over Current Event
USBPE4	46	O	DFP4 USB PE USB Power Enable Mode High: Enable Low: Off

Side Band Signal and Miscellaneous

Pin Name	Pin #	I/O	Signal Description
GPIO0 / HID0 / ATT0	67	I/O	GPIO / HID / UFP Attach Status Shared Pin (FW Config)
GPIO1 / HID1 / ORI0	68	I/O	GPIO / HID / UFP Mux Orientation Setting Shared Pin (FW Config)
GPIO2 / HID2 / ATT1	69	I/O	GPIO / HID / DFP1 Attach Status Shared Pin (FW Config)
GPIO3 / HID3 / ORI1	70	I/O	GPIO / HID / DFP1 Mux Orientation Setting Shared Pin (FW Config)
GPIO4 / HID4 / ATT4	71	I/O	GPIO / HID / DFP4 Attach Status Shared Pin (FW Config)
GPIO5 / EXTPWRON / WAKE / ORI4	73	I/O	GPIO / External Power Status / Wake / DFP4 Orientation Setting Shared Pin (FW Config)
GPIO6	74	I/O	GPIO (FW Config)
RESET#	78	I	System Reset Low: Reset High: Normal Operation
USBLED1/SPISI	79	I/O	DFP1 LED Indicator / SPISI shared pin. Active High Output for LED Use.
USBLED2/SPICLK	80	I/O	DFP2 LED Indicator / SPISCLK shared pin. Active High Output for LED Use.
USBLED3/SPISO	81	I/O	DFP3 LED Indicator / SPISO shared pin. Active High Output for LED Use.
USBLED4/SPICS	82	I/O	DFP4 LED Indicator / SPICS shared pin. Active High Output for LED Use.
VBUSDET0	49	I	UFP Vbus Detection (3.3V Max)

Electrical Specification

Absolute Maximum Rating

Symbol	Parameter	Min	Max	Unit	Note
T _{STG}	Storage Temperature	-55	125	°C	—
V ₃₃	3.3V Power Supply Voltage	-0.5	3.63	V	—
V ₁₀	1.05V Input Voltage	-0.5	1.1	V	—
V _{IN}	Input voltage at I/O pins	-0.5	(≤ 3.63) and (≤ V ₃₃ +0.3)	V	—
V _{ESD}	Electrostatic Discharge	-2000	2000	V	Human Body Model
θ _{jc}	Thermal resistance between junction and case	OFN76 For 4-layer PCB: 10.5 QFN88 For 4-layer PCB: 8.8			°C/W
θ _{ja}	Thermal resistance between junction and ambient	OFN76 For 4-layer PCB: 21.8 QFN88 For 4-layer PCB: 20.8			°C/W
P _D	Power dissipation	—	1.8	W	4L PCB definitions follow JESD51-7

Note: Stress above conditions may cause permanent damage to the device.
Functional operation of this device should be restricted to the conditions described.

Note: About thermal factors, T_a is the concerned ambient temperature, and

$$\theta_{ca} = \theta_{ja} - \theta_{jc}$$

$$T_j = \theta_{ja} * P_D + T_a$$

$$T_c = \theta_{ca} * P_D + T_a$$

Operating Conditions

Symbol	Parameter	Min	Max	Unit	Note
T _A	Ambient Temperature	0	70	°C	—
T _j	Junction Temperature	0	125	°C	—
V ₃₃	3.3V Power Supply Voltage	3.0	3.6	V	—
V ₁₀	1.05V Input Voltage	1.0	1.1	V	—
V _{IL}	Input Low Voltage	—	0.8	V	—
V _{IH}	Input High Voltage	2.3	—	V	—
V _{OL}	Output Low Voltage	—	0.4	V	I _{OL} =4mA
V _{OH}	Output High Voltage	2.4	—	V	I _{OH} =4mA
I _{IL}	Input Leakage Current	—	+/-10	μA	0<V _I <V ₃₃
I _{OZ}	Tristate Leakage Current	—	+/-20	μA	0<V _O <V ₃₃

Power consumption

The following consumption value applies up to typical condition.

Device connection	Typical			Suspend		
	V ₃₃ (mA)	V ₁₀ (mA)	Power(mW)	V ₃₃ (mA)	V ₁₀ (mA)	Power(mW)
4 * SSP	169	900	1503	0.3	16.5	16
4 * SS	142.6	734.7	1242	0.3	16.5	16
4 * HS	29.1	168	273	0.3	16.1	15.6
No Device	0.3	16.1	18	0.3	15.9	15.4

Note: T_A=25°C, V₃₃=3.3V, V₁₀=1.05V (0.91V Suspend)

SSP : Super Speed (USB3.1 Gen2) Device

SS : Super Speed (USB3.1 Gen1) Device

HS : High Speed (USB2.0) Device

Timing Requirements for SPI Flash

SPI flash ROM is used to store the FW data for VL820. Timing guidelines are provided to assist in selection of appropriate and compatible SPI flash. To ensure SPI flash suitability, not only should the timing requirements conform to the provided guidelines, but actual testing with VL820 should also be done.

Symbol	Parameters	Condition	Value	Unit
f_{CT}	Clock Frequency for fast read mode(*)	Max value must larger than	15	MHz
f_C	Clock Frequency for read mode	Max value must larger than	15	MHz
t_{RI}	Input Rise time	Max value must larger than	5	ns
t_{FI}	Input Fall time	Max value must larger than	5	ns
t_{CKH}	SCK High Time	Min value must smaller than	20	ns
t_{CKL}	SCK Low Time	Min value must smaller than	20	ns
t_{CEH}	CE# High Time	Min value must smaller than	100	ns
t_{CS}	CE# Setup Time	Min value must smaller than	20	ns
t_{CH}	CE# Holde Time	Min value must smaller than	100	ns
t_{DS}	Data In Setup Tiime	Min value must smaller than	20	ns
t_{DH}	Data In Hold Time	Min value must smaller than	20	ns
t_{HS}	Hold Setup Time	Not Utilized		
t_{HD}	Hold Time	Not Utilized		
t_V	Output Valid	Max value must smaller than	20	ns
t_{OH}	Output Hold Time Normal Mode	Not Utilized		
t_{LZ}	Hold to Output Low Z	Not Utilized		
t_{HZ}	Hold to Output High Z	Not Utilized		
t_{DIS}	Output Disable Time	Not Utilized		
t_{EC}	Erase Time	Max value must smaller than	100	ms
t_{PP}	Page Program Time	Max value must smaller than	100	ms
t_{VCS}	Vcc Setup Time	Min value must smaller than	1	ms
t_W	Write Status Register Time (Flash bit)	Max value must smaller than	100	ms

*Fast read mode must be supported.

Serial Input/Output Timing

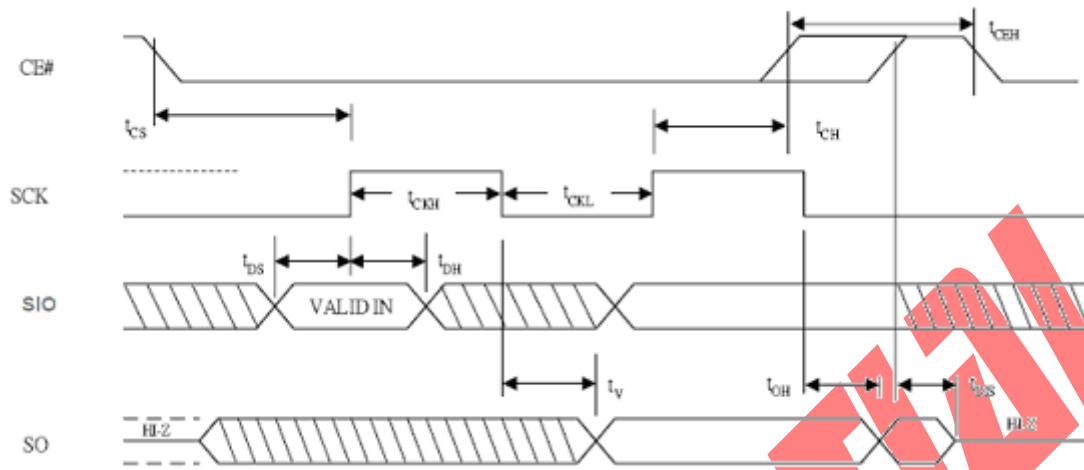


Figure 4 – Illustration of SPI Flash Interface Timing – (1)

Hold Timing

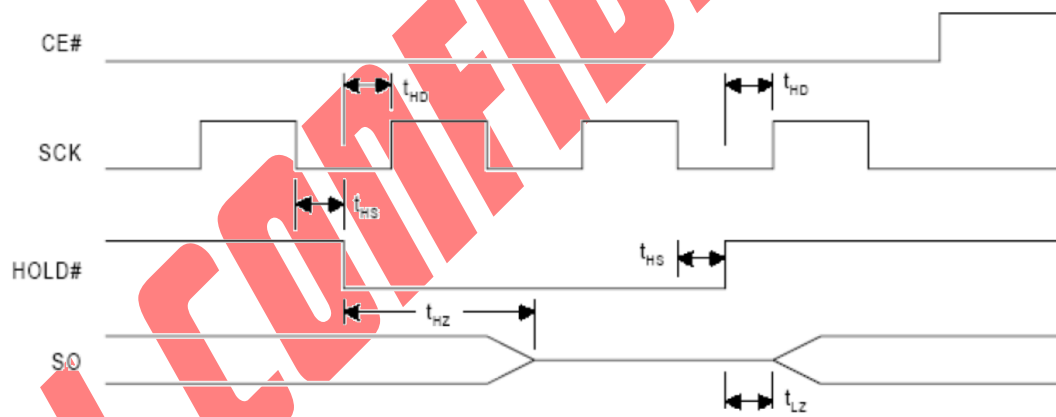


Figure 5 – Illustration of SPI Flash Interface Timing – (2)

General Reflow Profile Guidelines

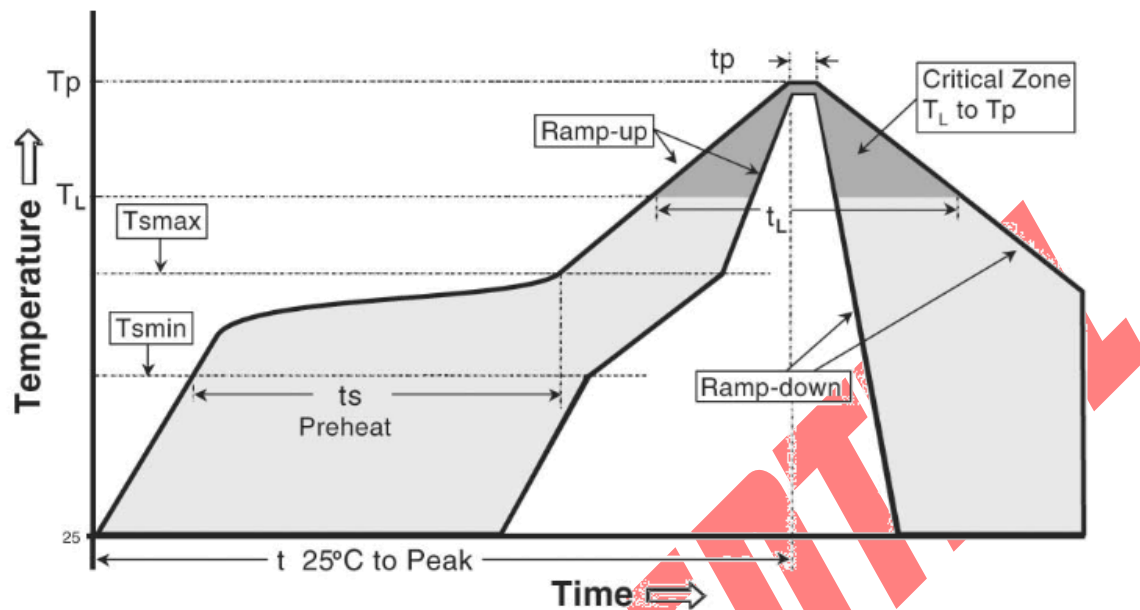


Figure 6 – Reflow

Profile Feature:	Sn-Pb Eutectic	Pb-Free solder
Average ramp-up rate (Liquidus Temperature (T_L) to Peak)	3°C/second max.	3°C/second max.
Preheat/Soak Temperature Min. (T_{smin}) Temperature Max. (T_{smax}) Time (min to max) (t_s)	100°C 150°C 60-120 seconds	150°C 200°C 60-120 seconds
$T_{s(max)}$ to T_L -Ramp-up Rate		3°C/second max.
Time maintained above: Temperature (T_L) Time (t_L)	183°C 60-150 seconds	217°C 60-150 seconds
Peak package body temperature(T_p) Time within 5°C of actual peak temperature(T_p)	225+5/-0°C 20 seconds	255 +5/0°C 30 seconds
Ramp-down rate (T_p to T_L)	6°C/second max.	6°C/second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.

***Note 1:** All temperatures refer to the center of package, measured on package body surface

***Note 2:** The reflow condition may vary with PCB design, pitch, size, reflow condition and solder suppliers, please contact your solder and reflow vendors.

Package Mechanical Specifications (VL820-Q7)

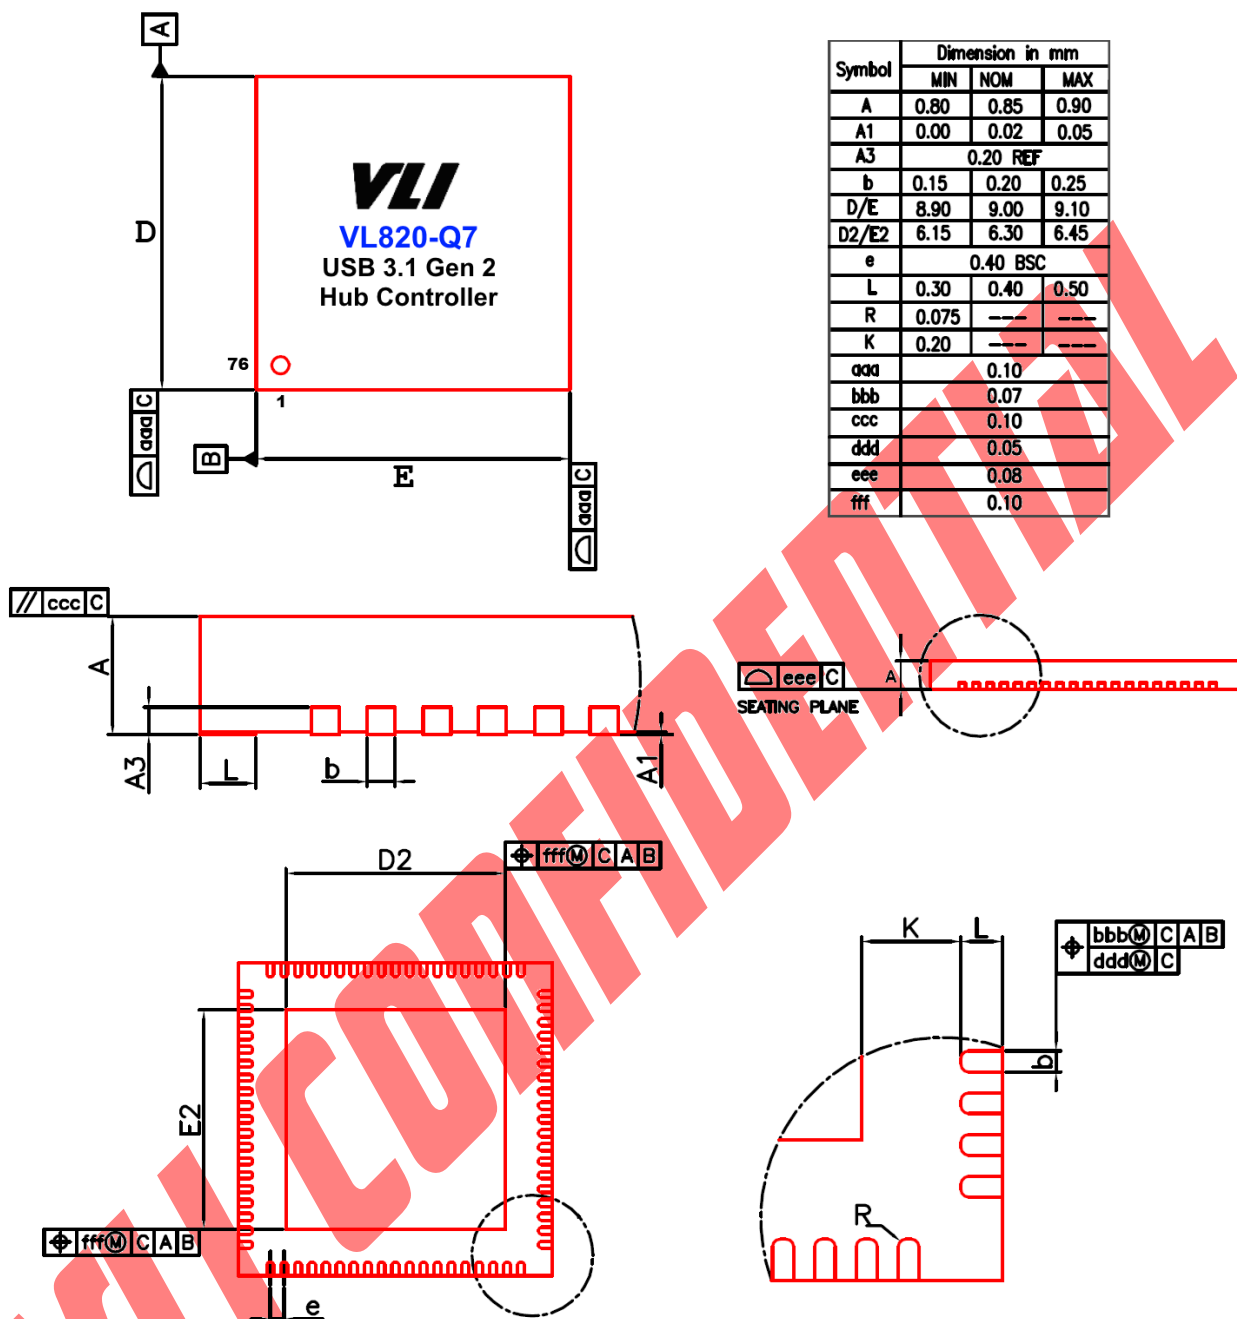


Figure 7 – Mechanical Specification – QFN 76L 9x9x0.85 mm Package

Package Mechanical Specifications (VL820-Q8)

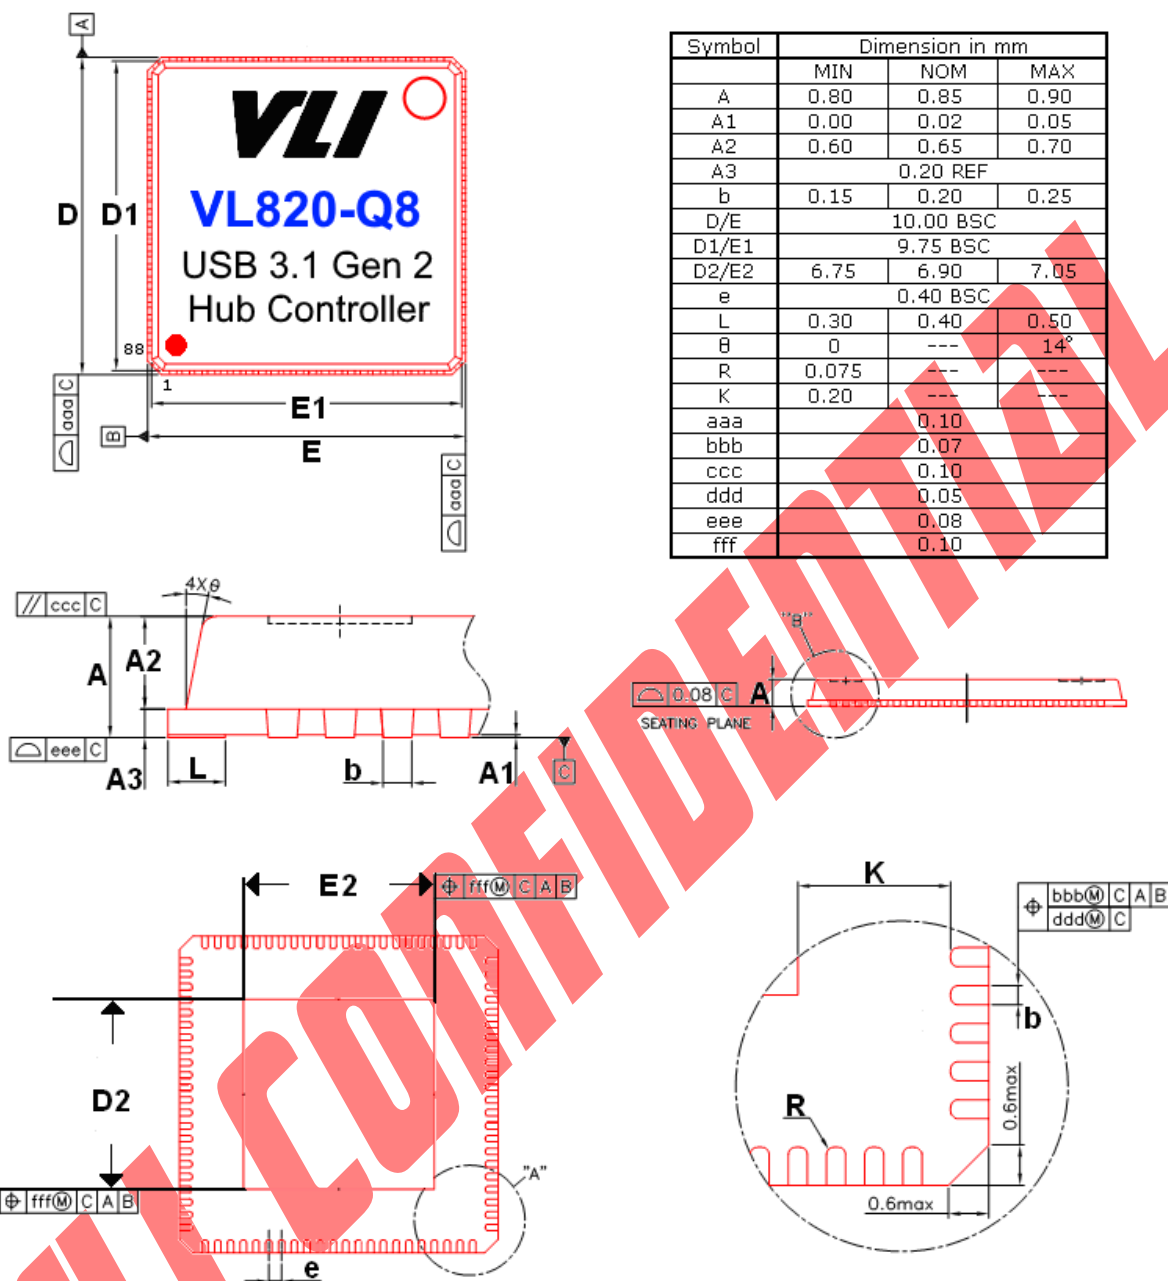


Figure 8 – Mechanical Specification – QFN 88L 10x10x0.85 mm Package

Package Top Side Marking & Ordering Information

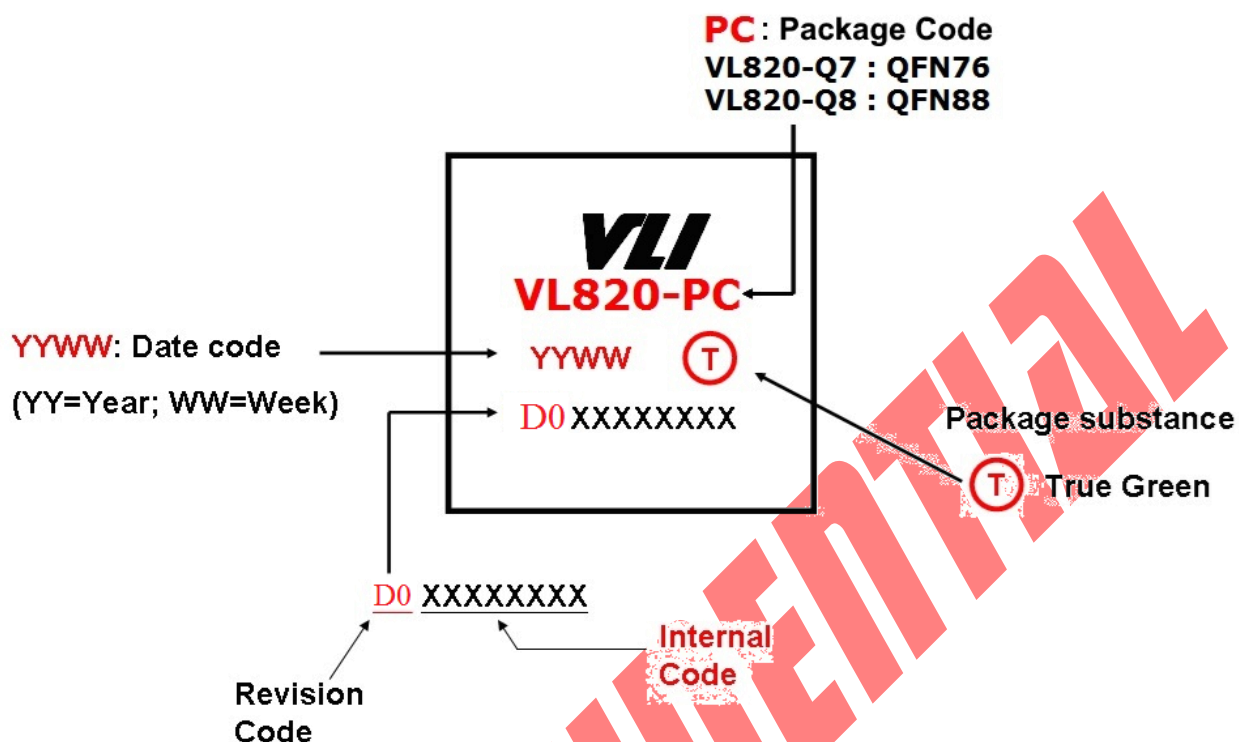


Figure 9 – Package Top Side Marking

Ordering Information

Part Number	Description	Package
VL820-Q7 (D0)	4-Port USB3.1 Gen2 Hub	QFN76 9x9 mm
VL820-Q8 (D0)	4-Port USB3.1 Gen2 Type-C Hub: UFP*1, DFP *2 with Mux	QFN88 10x10 mm

CONFIDENTIAL

VIA Labs, Inc.

www.via-labs.com

7F, 529-1, Zhongzheng Rd.,
Xindian District, New Taipei City 23148 Taiwan

Tel: (886-2) 2218-1838

Fax: (886-2) 2218-2553

Email: sales@via-labs.com.tw

Copyright © 2016 VIA Labs, Inc. All Rights Reserved.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written permission of VIA Labs, Inc. The material in this document is for information only and is subject to change without notice. VIA Labs, Inc. reserves the right to make changes in the product design without reservation and without notice to its users.

All trademarks are the properties of their respective owners.

No license is granted, implied or otherwise, under any patent or patent rights of VIA Labs, Inc. VIA Labs, Inc. makes no warranties, implied or otherwise, in regard to this document and to the products described in this document. The information provided by this document is believed to be accurate and reliable as of the publication date of this document. However, VIA Labs, Inc. assumes no responsibility for any errors in this document. Furthermore, VIA Labs, Inc. assumes no responsibility for the use or misuse of the information in this document and for any patent infringements that may arise from the use of this document. The information and product specifications within this document are subject to change at any time, without notice and without obligation to notify any person of such change.